



Triple-Locking Tilting Hitch

2025

PRODUCT OVERVIEW..... 01
SPECIFICATIONS & FEATURES..... 03



*Pictured model: 7-9.9T Hydraulic Tilting Hitch



Triple-Locking Tilting Hitch

AVAILABLE FOR 1T-36T

Aussie Buckets' Hydraulic Tilting Hitch also known as a Tilting Quick Hitch, Tilt Adapter, or Tilting Head offers seamless attachment changes while allowing for precise tilt control, maximising efficiency on-site. As part of our Triple-Lock Range, it features three mechanical safety locking points, ensuring exceptional security and peace of mind, while meeting Australian Design Standard Compliance AS4772:2008.

Designed for safety and reliability, it includes check/balance valves for the ram, preventing accidental drops in the event of hydraulic failure. With up to 180 degrees of tilt, this hitch provides the precision and flexibility required for demanding excavation, earthmoving, and construction tasks.

Built for durability, the hitch body is constructed from high-tensile Q690 steel, ensuring superior strength and wear resistance.

Each unit is fully equipped with greaseable pins for direct mounting, hydraulic mounts, a buzzer and switch, a wiring harness, hoses, couplers, and a pilot valve, ensuring smooth and hassle-free operation.


Our Hydraulic Tilting Hitch delivers unmatched performance, safety, and efficiency, making it an essential tool for any heavy machinery fleet.

Specifications

Tonnage	Pin Diameter (mm)	Weight (kg)	Tilt Degree (°)	Drive Torque (nm)	Tilt Pressure (Bar)	Tilt Flow (lpm)
1 - 1.9	20 - 30	56	180	930	930	5 - 16
2 - 3.9	35 - 40	88	180	2870	2870	5 - 16
4 - 6.9	40 - 45	150	180	4400	4400	5 - 16
7 - 9.9	50 - 55	165	180	4400	4400	5 - 16
10 - 17.9	60 - 65	385	140	10623	10623	19 - 58
18 - 25	70 - 80	620	140	14600	14600	35 - 105
26 - 36	90 - 100	1500	120	43000	43000	35 - 105

Tonnage	Hitch Pressure (Bar)	Hitch Flow (lpm)	Rated Lift Point Capacity (kg)	Max Lift Point Capacity (kg)
1 - 1.9	25 - 300	15 - 25	1000	1500
2 - 3.9	25 - 300	15 - 25	1000	1500
4 - 6.9	25 - 300	15 - 25	1000	1500
7 - 9.9	25 - 300	15 - 25	1500	2250
10 - 17.9	25 - 300	15 - 25	3000	4500
18 - 25	25 - 300	15 - 25	3000	4500
26 - 36	25 - 300	15 - 15	3000	4500

Features

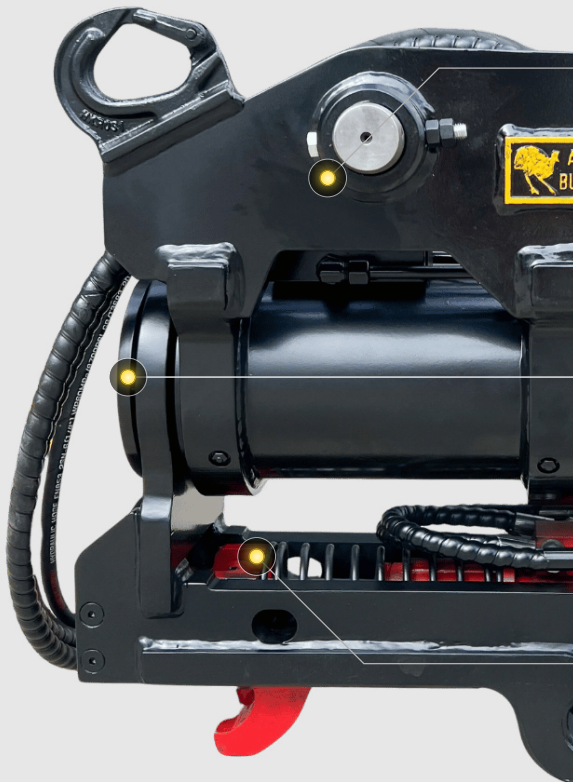

Complete Package

Built with premium hydraulics and seals. Models 19T+ feature a large accumulator for a stable hydraulic system.

180° Tilt Function

Internal drive allows 180° tilt with no exposed rams, enabling efficient operation at tight angles without repositioning the excavator.

Triple-Locking Design

Triple locking system with primary retention, secondary and tertiary locking mechanisms to prevent your attachment from dropping or swinging, even if the cylinder fails.

AUSSIE BUCKETS

SAY NO TO MARKUPS

For complete information on Aussie Buckets products and industry solutions, visit our website:

www.aussiebuckets.com.au

The photos in this catalog display various tonnages and are for illustrative purposes only. To confirm specific wear and design elements, please discuss your requirements with a member of our team. Final designs and wear elements may vary by tonnage. All product specifications were accurate at the time of publishing; however, these may differ from current specifications. For the latest details, please consult with an attachment specialist.

The words "Aussie Buckets" and the associated logo are registered trademarks within Australia.

© 2025 AUSSIE BUCKETS PTY LTD