

Cable Bucket

2025

PRODUCT	OVERVIEW	. 01
SPECIFIC	CATIONS & FEATURES	. 03



red model: 12-14 T Cable Bucket

Cable Bucket

AVAILABLE FOR 3-24 T

Introducing the Cable Bucket, a versatile and robust solution engineered to meet the diverse needs of modern excavation and material handling.

Available in two distinct variants—the Cable Bucket with Teeth and the Cable Bucket with a cutting edge—this product ensures customers have the optimal tool for their specific applications.


The innovative dual radius design maximises breakout force and cycle times, while its elongated belly supports effective compaction tasks, offering unmatched flexibility.

Crafted for durability, the Cable Bucket features a construction of Hardox 500 and high-strength SM490 Steel, delivering exceptional longevity and abrasion resistance.

Enhanced with underbelly wear strips and reinforced plating, it provides superior wear protection. Its lightweight and narrow design, tailored to tonnage, allows operation in tight access areas with minimal soil displacement, reducing backfilling requirements. This design also minimises machine strain, improves fuel efficiency, and accelerates cycle times.

Backed by our industry-leading 5-year warranty, the Cable Bucket combines cutting-edge engineering with reliability, setting a new standard for performance and durability in the field.



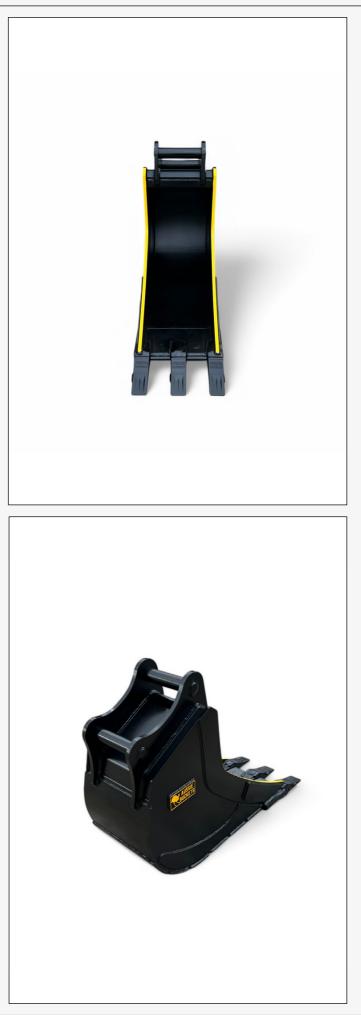

Specifications

Tonnage	Width (mm)	Weight (kg)	Teeth	Steel Grade
3 - 4	200	70	2	HARDOX 500 + SM490
3 - 4	300	78	3	HARDOX 500 + SM490
3 - 4	450	94	3	HARDOX 500 + SM490
3 - 4	600	110	4	HARDOX 500 + SM490
5 - 7	300	100	3	HARDOX 500 + SM490
5 - 7	450	124	3	HARDOX 500 + SM490
5 - 7	600	150	4	HARDOX 500 + SM490
8-11	300	136	3	HARDOX 500 + SM490
8-11	450	162	3	HARDOX 500 + SM490
8-11	600	192	4	HARDOX 500 + SM490
12-14	300	265	2	HARDOX 500 + SM490
12-14	450	297	3	HARDOX 500 + SM490
12-14	600	340	3	HARDOX 500 + SM490
12-14	750	386	4	HARDOX 500 + SM490
12-14	900	422	5	HARDOX 500 + SM490
15-18	300	292	2	HARDOX 500 + SM490
15-18	450	327	3	HARDOX 500 + SM490
15-18	600	374	3	HARDOX 500 + SM490
15-18	750	425	4	HARDOX 500 + SM490
15-18	900	464	4	HARDOX 500 + SM490
15-18	1,000	504	5	HARDOX 500 + SM490
20-24	450	464	2	HARDOX 500 + SM490
20-24	600	505	3	HARDOX 500 + SM490
20-24	750	550	3	HARDOX 500 + SM490
20-24	900	606	4	HARDOX 500 + SM490
20-24	1,200	710	5	HARDOX 500 + SM490
20-24	1,500	918	6	HARDOX 500 + SM490

Features



Multiple Variations

Coming in two different variants including the Cable Bucket with Teeth and the Cable Bucket which will utilise a cutting edge. This is ensuring the customer has the best solution for their use case.

Dual Radius Design

Designed with multiple use in mind, the dual radius design for maximum breakout force and cycle times but also allowing for compaction tasks with the elongated belly.

Durable Construction

Built with Hardox 500 and High Strength SM490 Steel for longevity and abrasion resistance. Equipped with underbelly wear strips and reinforced plating to enhance the wear protection and resistance even more.

Light Weight and Narrow Design

A narrow build, tailored to tonnage, enables use in tight access areas with minimal soil displacement, reducing backfilling needs. Its lightweight design lowers machine strain, boosts fuel efficiency, and enhances cycle times.

AUSSIE BUCKETS

For complete information on Aussie Buckets products and industry solutions, visit our website: www.aussiebuckets.com.au

The photos in this catalog display various tonnages and are for illustrative purposes only. To confirm specific wear and design elements, please discuss your requirements with a member of our team. Final designs and wear elements may vary by tonnage. All product specifications were accurate at the time of publishing; however, these may differ from current specifications. For the latest details, please consult with an attachment specialist.

The words "Aussie Buckets" and the associated logo are registered trademarks within Australia.

© 2025 AUSSIE BUCKETS PTY LTD