

# **Rock Breaker**

2025

PRODUCT OVERVIEW	0
SPECIFICATIONS & FEATURES	Ø.



AVAILABLE FOR 1-60T

## **Rock Breaker**

Aussie Buckets' Rock Breakers also known as Hydraulic Hammers, Rock Hammers, or Concrete Breakers are engineered for maximum impact, delivering exceptional breaking force across rock, concrete, and asphalt. Designed with advanced hydraulic components, these breakers ensure powerful penetration while incorporating noise reduction and vibration dampening technology, minimising site disruption and improving operator comfort.

Built for durability, each unit undergoes a state-of-theart heat treatment process to reduce piston wear during lateral movements, extending service life and reliability. To minimise downtime, the breaker includes replaceable

components for easy maintenance. Every unit comes precharged and includes a head bracket, two chisels (wedge & moil type), spring-guarded hoses, side couplers, a service kit, spare seal kit, and an empty nitrogen body for maintenance adjustments.


Optional post cap attachments and side mounted ear plates are also available for additional functionality. Whether you need to break, pry, or demolish, these Rock Breakers offer unmatched power, durability, and ease of use, making them an essential tool for any heavy-duty worksite.





### **Specifications**

Tonnage	Chisel Diameter (mm)	Weight (kg)	Oil Flow (LPM)	Working Pressure (BAR)	Impact Rate (BMP)	Impact Energy (J)	Chisel Length (mm)	Hose Diameter
1.0-1.6	40	120	15-30	90-120	800-1400	250	400	1/2
1.7-3.0	45	150	20-40	120-150	700-1200	280	500	1/2
2.5-4.5	53	180	25-50	120-150	600-1100	420	550	1/2
4.0-7.0	68	330	40-70	140-160	500-900	700	700	1/2
6.0-9.0	75	420	50-90	140-160	400-800	1,100	750	1/2
7.0-14.0	85	600	60-100	160-180	400-800	1,400	850	3 / 4
10.0-15.0	100	860	80-110	180-200	350-700	2,000	1,000	3 / 4
15.0-18.0	125	940	100-150	200-230	350-650	2,700	1,150	1
19.0-26.0	140	1440	120-200	220-260	350-500	4,100	1,300	1
26.0-32.0	155	2300	200-260	240-270	250-400	6,800	1,500	1-1/4
32.0-40.0	165	2800	200-260	240-270	250-400	9,000	1,600	1-1/4
40.0-45.0	175	4300	210-290	250-280	200-350	12,500	1,600	1-1/4
45.0-55.0	185	5300	150-200	200-260	150-200	16500	1,600	1-1/4
55.0-60.0	195	5400	150-200	200-260	150-200	21800	1,700	1-1/4

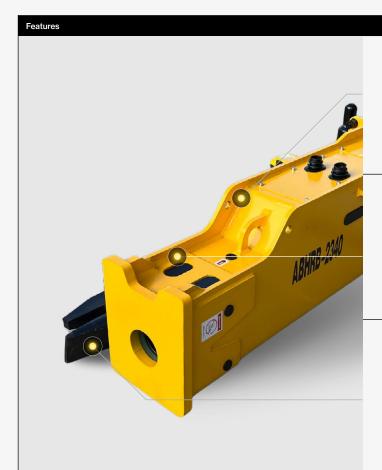

#### **Advanced Hydraulic System**

Built with premium hydraulics and seals. Models 19T+ feature a large accumulator for a stable hydraulic system.

#### **Noise Reduction & Vibration Dampening**

Boxed body with noise-cancelling dampeners reduces noise and vibrations, ensuring a quieter, safer worksite.

#### **High-Quality Design & Durability**

Best performance for price on the market, high impact energy and impact rate for faster material processing.

## AUSSIE BUCKETS

For complete information on Aussie Buckets products and industry solutions, visit our website:

www.aussiebuckets.com.au

The photos in this catalog display various tonnages and are for illustrative purposes only. To confirm specific wear and design elements, please discuss your requirements with a member of our team. Final designs and wear elements may vary by tonnage. All product specifications were accurate at the time of publishing; however, these may differ from current specifications. For the latest details, please consult with an attachment specialist.

The words "Aussie Buckets" and the associated logo are registered trademarks within Australia.

© 2025 AUSSIE BUCKETS PTY LTD